
# PUSH-AROUND SERIES

PUSH-AROUND MOBILE ELEVATED WORK PLATFORM

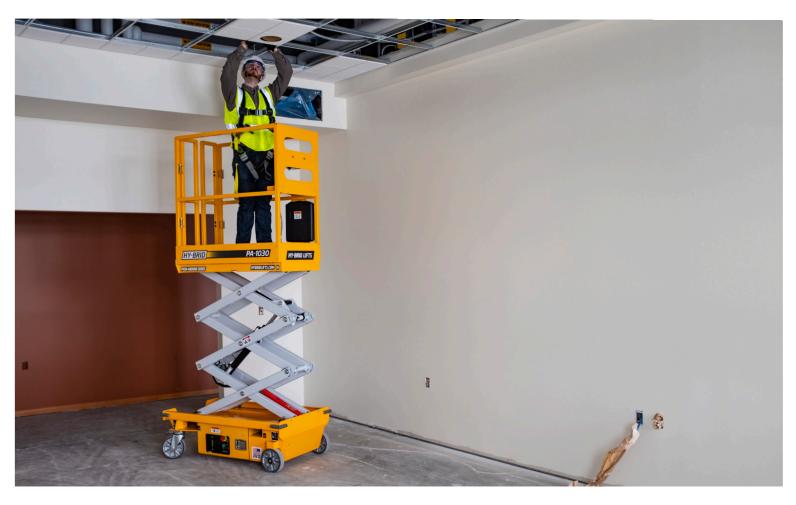

## THE SAFER & MORE PRODUCTIVE ALTERNATIVE TO **LADDERS & SCAFFOLDING**

#### STANDARD FEATURES

- ▶ Tool holder
- Parts tray
- ▶ Saloon-style entry gate
- ▶ Battery condition indicator at upper controls
- ▶ Two-handed vertical operation
- Oversized scissor pins
- Maintenance-free design
- **Bumpers**
- Forklift pockets
- ▶ Recessed charger outlet
- ▶ Total-lock rear casters

- Onboard diagnostics
- Slide out component drawer
- ▶ Auto-lock front casters
- Lanyard attach point
- **Horn**
- Manual descent pull cable
- ▶ Tilt alarm
- Non-slip deck
- ▶ 2-year parts & labor warranty
- ▶ 5-year structural warranty

#### **OPTIONS**

- ▶ 110V power-to-platform
- ▶ Flashing beacon
- AGM batteries
- Inverter

### STANDARDS COMPLIANCE

- NSI A92.20
- CSA B354.6:17
- ▶ EN-280:2013+A1:2015







#### PUSH-AROUND SERIES

PUSH-AROUND MOBILE ELEVATED WORK PLATFORM

SPECIFICATIONS			
A	Working Height (1 Person Indoor)	16 ft	4.9 m
В	Platform Height Maximum (1 Person Indoor)	10 ft	3 m
C	Platform Height Minimum	25.2 in	64 cm
	Ground Clearance Elevated	N/A	
D	Ground Clearance Lowered	2.6 in	6.6 cm
E	Overall Length	51.3 in	130.3 cm
F	Overall Width	29.8 in	75.7 cm
G	Stowed Height	68.7 in	174.5 cm
Н	Platform Length	40.9 in	103.9 cm
1	Platform Width	20.5 in	52.1 cm
	Tires (Front/Rear)	8/8 in	20.3/20.3 cm
PERFORMANCE			
Rated Occupancy (Indoor)		1 Person	
Platform Capacity		530 lbs	240.4 kg
Gradeability		N/A	
Inside Turn Radius		Zero	
Drive Speed Elevated (Proportional)		N/A	
Drive Speed Lowered (Proportional)		N/A	
Lift S	Speed (Up/Down)	18/20 sec	
Pow	ver Source	12V DC	
FLOOR LOADING			
Weight		893 lbs	405.1 kg
Wheel Load at Minimum Capacity		315 psi	2171.9 kPa
Wheel Load at 500 lbs Capacity		369.6 psi	2548.3 kPa
Whe	eel Load at Maximum Capacity	372.1 psi	2565.5 kPa

