AXCS EQUIPMENT

EL-2632e
SCISSOR

EL SERIES
SELF-PROPELLED MOBILE ELEVATED WORK PLATFORM

STANDARD FEATURES

- Electric drive
- Proportional controls
- LeakGuard®
- 110V power-to-platform
- Indoor & outdoor operation settings
- 30A charger
- Non-slip deck
- All motion alarm
- Flashing beacon
- Removable platform controls
- Self-locking gate
- Liftable with forklift or crane
- Dual maintenance bars
- Onboard diagnostic system
- Manual decent cable
- Active tilt alarm
- Slide out extension
- Automatic pothole protection
- Non-marking tires
- Horn
- CAN communication protocol
- 2-year parts & labor warranty
- 5-year structural warranty

STANDARDS COMPLIANCE

- ANSI A92.20

OPTIONS

- Perimeter Lights
- Telematics

EL SERIES

SPECIFICATIONS		EL-2632e
A	Working Height (2 Person Indoor)	**32.3 ft** 9.85 m
	Working Height (1 Person Outdoor)	**26 ft** 7.9 m
B	Platform Height Maximum (2 Person Indoor)	**26.3 ft** 8 m
	Platform Height Maximum (1 Person Outdoor)	**20 ft** 6.1 m
C	Platform Height Minimum	**47.6 in** 1.21 m
D	Ground Clearance Elevated	**0.79 in** 2 cm
E	Ground Clearance Lowered	**3.5 in** 9 cm
F	Overall Length w/ Step	**97.3 in** 2.47 m
G	Overall Width	**31.5 in** 0.8 m
H	Stowed Height (Rails Unfolded)	**91 in** 2.31 m
	Stowed Height (Rails Folded)	**71 in** 1.8 m
I	Platform Length	**91 in** 2.31 m
J	Platform Width	**31 in** 0.79 m
	Slide Out Extension Deck Length	**34 in** 0.86 m
	Wheelbase	**73.2 in** 1.86 m
	Tires	**15 x 5 in** 38 x 12.7 cm
PERFORMANCE		
Rated Occupancy (Indoor/Outdoor)		**2 / 1 Person(s)**
Platform Capacity		**530 lbs** 240 kg
Slide Out Extension Deck Capacity		**250 lbs** 113 kg
Gradeability		**25%**
Inside Turn Radius		**0 in** 0 cm
Drive Speed Elevated		**0.4 mph** 0.6 km/h
Drive Speed Lowered		**2.8 mph** 4.5 km/h
Working Slope		**1.5° / 3°**
Lift Speed (Up/Down)		**44 / 38 s**
Weight		**5220 lbs** 2368 kg
POWER		
Hydraulic Tank Capacity		**5.5 gal** 20.7 L
Battery		**4 x 6V 225 Ah**

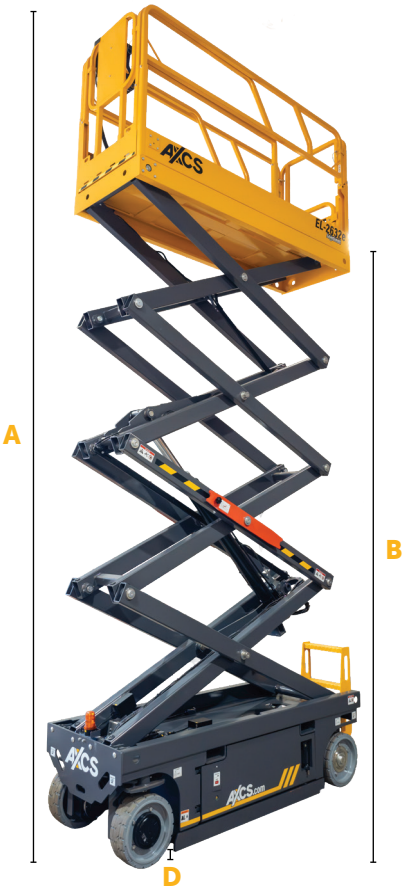

This brochure is for illustrative purposes only and based on the latest information available at the time of printing.
AXCS Equipment reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment.
©2026 AXCS Equipment all rights reserved.
6|26 Part No. EL-00001