


EL SERIES

SPECIFICATIONS	EL-2645e	EL-3245e	EL-4045e
A Working Height (2/3 Person Indoor)	32.3 ft 9.8 m	38.8 ft 11.8 m	45.4 ft 13.8 m
Working Height (1 Person Outdoor)	25.7 ft 7.8 m	32.3 ft 9.8 m	38.8 ft 11.8 m
B Platform Height Maximum (2/3 Person Indoor)	26.3 ft 8 m	32.8 ft 10 m	39.4 ft 12 m
Platform Height Maximum (1 Person Outdoor)	19.7 ft 6 m	26.3 ft 8 m	32.8 ft 10 m
C Platform Height Minimum	47.6 in 1.21 m	52.8 in 1.34 m	57.5 in 1.46 m
D Ground Clearance Elevated	0.79 in 2 cm	0.79 in 2 cm	0.79 in 2 cm
E Ground Clearance Lowered	4.7 in 12 cm	4.7 in 12 cm	4.7 in 12 cm
F Overall Length w/Step	97.3 in 2.47 m	97.3 in 2.47 m	97.3 in 2.47 m
G Overall Width	45 in 1.15 m	45 in 1.15 m	45 in 1.15 m
H Stowed Height (Rails Unfolded)	91 in 2.31 m	96.1 in 2.44 m	101.2 in 2.57 m
Stowed Height (Rails Folded)	65.7 in 1.67 m	73.2 in 1.86 m	75.6 in 1.92 m
I Platform Length	91 in 2.31 m	91 in 2.31 m	91 in 2.31 m
J Platform Width	45 in 1.14 m	45 in 1.14 m	45 in 1.14 m
Slide Out Extension Deck Length	39.4 in 1 m	39.4 in 1 m	39.4 in 1 m
Wheelbase	73.2 in 1.86 m	73.2 in 1.86 m	73.2 in 1.86 m
Tires	15 x 5 in 38 x 12.7 cm	15 x 5 in 38 x 12.7 cm	15 x 5 in 38 x 12.7 cm

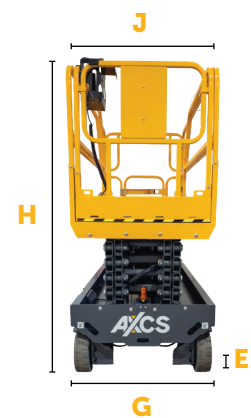

PERFORMANCE

Rated Occupancy (Indoor/Outdoor)	3 / 1 Person(s)	2 / 1 Person(s)	2 / 1 Person(s)
Platform Capacity	992 lbs 450 kg	661 lbs 300 kg	661 lbs 300 kg
Slide Out Extension Deck Capacity	330 lbs 150 kg	330 lbs 150 kg	330 lbs 150 kg
Gradeability	25%	25%	25%
Inside Turn Radius	0 in 0 cm	0 in 0 cm	0 in 0 cm
Drive Speed Elevated	0.4 mph 0.6 km/h	0.4 mph 0.6 km/h	0.4 mph 0.6 km/h
Drive Speed Lowered	2.8 mph 4.5 km/h	2.8 mph 4.5 km/h	2.8 mph 4.5 km/h
Working Slope	2° / 3°	2° / 3°	1.5° / 3°
Lift Speed (Up/Down)	35 / 35 s	47 / 47 s	55 / 55 s
Weight	5709 lbs 2590 kg	6325 lbs 2869 kg	7650 lbs 3470 kg

POWER

Hydraulic Tank Capacity	5.5 gal 20.7 L	5.5 gal 20.7 L	5.5 gal 20.7 L
Battery	4 x 6V 315 Ah	4 x 6V 315 Ah	4 x 6V 315 Ah

