AXCS EQUIPMENT

TH-1256
TELEHANDER

STANDARD FEATURES

DRIVE

- Deutz TCD 3.6 L4 107hp diesel engine
- Engine block heater
- Powershift 4F, 3R transmisson
- Back-up alarm
- 4-wheel drive
- 3 steering modes: 2-wheel, 4-wheel & crab

AXLES

- Integrated draw bar
- Dana 213 front axle with limited slip differential
- Rear axle stabilization
- +/- 10 degree frame leveling

BRAKES

- Front & rear multi-disc oil bath brake system
- SAHR parking brake with indicator light

HYDRAULIC SYSTEM

- 40 gal hydraulic capacity
- Auxiliary hydraulics with load sensing piston pump

CAB & OTHER

- Open cab
- Multi-adjustable ergonomic suspension seat
- In-cab multifunction display
- Boom mounted lift hook
- Battery disconnect
- Telematics ready
- Steel fuel and hydraulic tanks
- Easy maintenance and service
- Long life boom wear pads
- Phone holder
- Integrated arm rest
- Beacon

KEY SPECIFICATIONS

- Maximum capacity.....12,000 lbs
- Maximum lift height.....56 ft
- Capacity @ max lift height.....5,000 lbs
- Maximum forward reach ..... 42.25 ft
- Capacity @ max reach.....3,000 lbs
- Weight .....34,657 lbs

OPTIONS *Build to order only

- Deutz TCD 3.6 L4 120hp diesel engine*
- Closed cab*
- Air conditioning (closed cab only)*
- Premium joystick with drive and shift control functions
- Road lights
- Work lights
- Boom lights
- Four wheel fenders
- Back up sensor
- Back up camera & sensor
- Load management system* (LLMI)
- Cold weather package*
- Arctic weather package*
- Telematics
- Pneumatic or non-marking pneumatic tires 400/75-28
- Foam-filled or non-marking foam-filled tires 400/75-28
- Solid rubber or non-marking solid rubber tires 14x28
- Turf tires 50x15.00-28

ATTACHMENTS

CARRIAGES

- 48, 60, or 72 in standard carriage
- 48, 60, or 72 in side tilt carriage
- 72 in swing carriage

FORKS

- 2.36 x 4 x 48 in, 12,000 lbs capacity
- 2.36 x 4 x 60 in, 12,000 lbs capacity
- 2 x 5 x 60 in, 12,000 lbs capacity
- 2 x 5 x 72 in, 12,000 lbs capacity

TH-1256
TELEHANDER

DIMENSIONS			
Maximum Lift Height		**56 ft**	17.1 m
Maximum Forward Reach		**42.25 ft**	12.9 m
A	Stowed Length w/o Forks	**21 ft**	6.4 m
B	Overall Width	**8.6 ft**	2.6 m
C	Stowed Height	**8.8 ft**	2.6 m
D	Wheelbase	**11.5 ft**	3.5 m
E	Inside Tire Width	**7.1 ft**	2.16 m
F	Ground Clearance	**17 in**	43 cm
Standard Forks		**2.36 x 4 x 48 in**	6 x 10 x 122 cm

SPECIFICATIONS		
Max Lifting Capacity	**12,000 lbs**	5,443 kg
Max Lifting Capacity at Full Height	**5,000 lbs**	2,267 kg
Max Lifting Capacity at Max Reach	**3,000 lbs**	1,361 kg
Operating Weight	**34,657 lbs**	15,720 kg
Inside Turning Radius	**60 in**	1.5 m
Outside Turning Radius	**149 in**	3.8 m
Drive Speed	**20 mph**	32 kph
Frame Leveling	**+/- 10°**	
Tilt Angle	**122°**	
Boom Lifting Angle	**72° w/stabilizers**	

BOOM CYCLE TIMES	
Lifting	**14.92 s**
Lowering	**15.13 s**
Extension	**22.01 s**
Retraction	**20.14 s**
Crowd	**3.72 s**
Dump	**5.16 s**

POWER		
Power Source	**Diesel**	
Engine Make and Model	**Deutz TCD 3.6 L4**	
Horsepower	**107 hp**	
Fuel Tank	**40 gal**	150 L
Hydraulic Tank	**40 gal**	150 L
Hydraulic Flow	**37 gal/min**	140 L/min

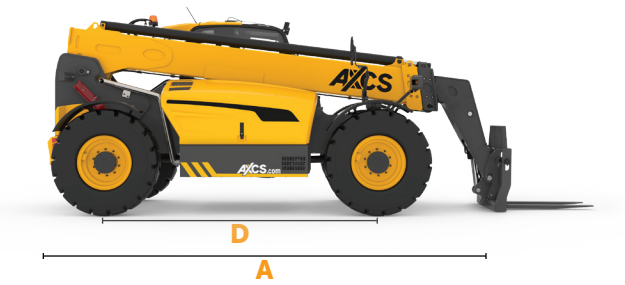

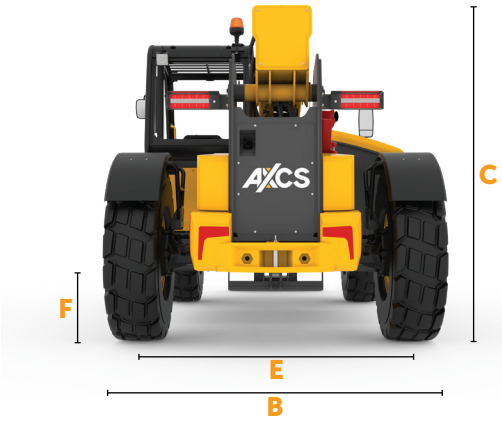

TH-1256 LOAD CHARTS

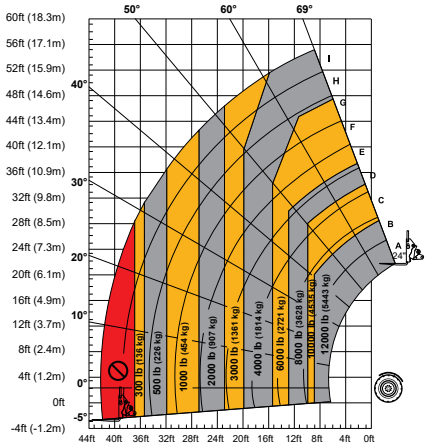

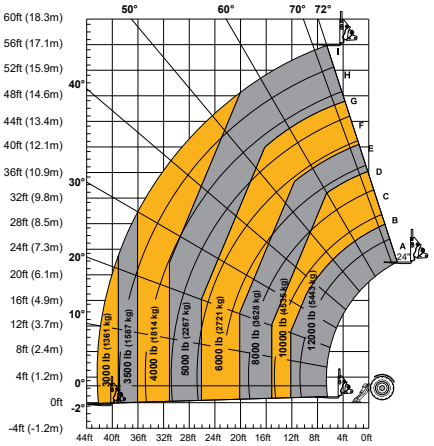

AXCS "2 & 5" Warranty
Two (2) full years or 2,000 hours on the full machine and cover all specified major structural components for five (5) years.

This brochure is for illustrative purposes only and based on the latest information available at the time of printing.
AXCS Equipment reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment.
©2026 AXCS Equipment all rights reserved.
2|26 Part No. TH-00005